

## **Core Sand Mixers**

## The KLANN PKM core sand mixers have the following features:

- slightly inclined mixer bin with a spherical bottom assure an intensive mixture without any dead zones
- no use of flaps or sliders for material discharge, so no plugging or clogging by hardened mixture is a problem. Emptying by tilting of the mixer bin
- the design of the mixer with the front discharge allows an installation on the floor level with easy access. In combination with the KLANN hoist gear transport system HLK a direct supply of core shooters from the floor level is possible.
- mixer bin and tools easily accessible for cleaning or change
- binder nozzles with quick release couplings for cleaning and capacity gauging
- fast production of small mixer charges to avoid longer retention times and pre-hardening before shooting
- high energy efficiency

The sand feed can be dosed either by a volumetric dosing device or by a weighing device. The volumetric dosing device allows fixed half or full mixture loads. The weighing bin offers variable loads of different raw material and additives to a certain precision. These dosing devices are offered by KLANN as part of the core sand processing equipment.



PKM mixer in discharge position




PKM mixer with front protection for separate installation



integration of a PKM mixer at floor level with a HLK sand distribution system



## **Core Sand Mixers**

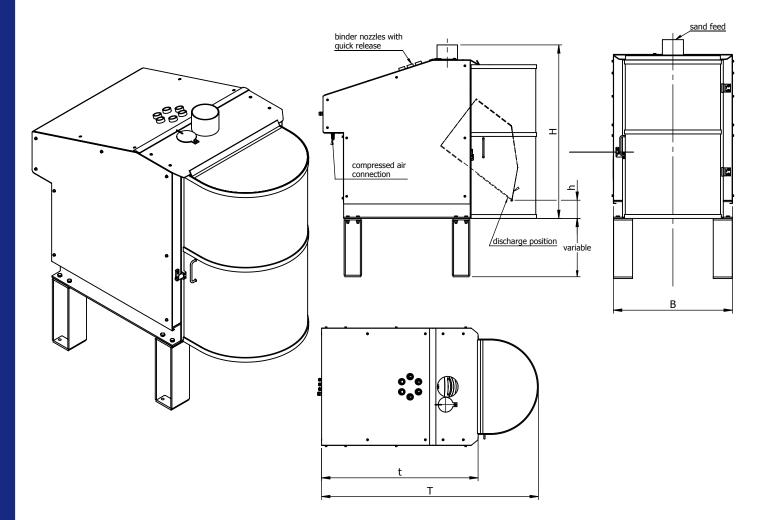

main dimensions PKM mixer without sand dosing equipment

	PKM-30	PKM-40	PKM-50
mixing volume:	30 liters	40 liters	50 liters
mixer charges:	22.5 – 45 kg	30 – 60 kg	37.5 – 75 kg
max. production:	2.2 t/hr	2.9 t/hr	3.6 t/hr
drive power:	2.2 kW	3.0 kW	4.0 kW
main dimensions:			
mixer width [B]:	760 mm	850 mm	930 mm
mixer height without support [H]:	1,130 mm	1,200 mm	1,300 mm
discharge height [h]:	120 mm	50 mm	50 mm
depth incl. front protection [T]:	1,400 mm	1,500 mm	1,600 mm
depth without front protection [t]:	1,010 mm	1,100 mm	1,200 mm